

This pole is 12ft above ground 3ft below ground and 15ft total and it is ideal for a top post fixture

**Specifications and Features:** Conforms to ASTM-A 500 Grade B: Minimum yield strength of 46.000 PSI.

**Finish:** Textured architectural black powder coat finish, baked to ensure maximum paint adhesion, hardness and durability. Special asphalt coating on 3ft below ground

**Surface treatment:** Hot dip galvanizing


**Pole Length:** 15 feet. 12' Pole above ground, 3 feet underground

### **MOUNTING OPTIONS**


It has a tenon built into the top already to reduce from 3" to 2-3/8 to accept post top or fixture.

### **WARRANTY**

7-Year warranty

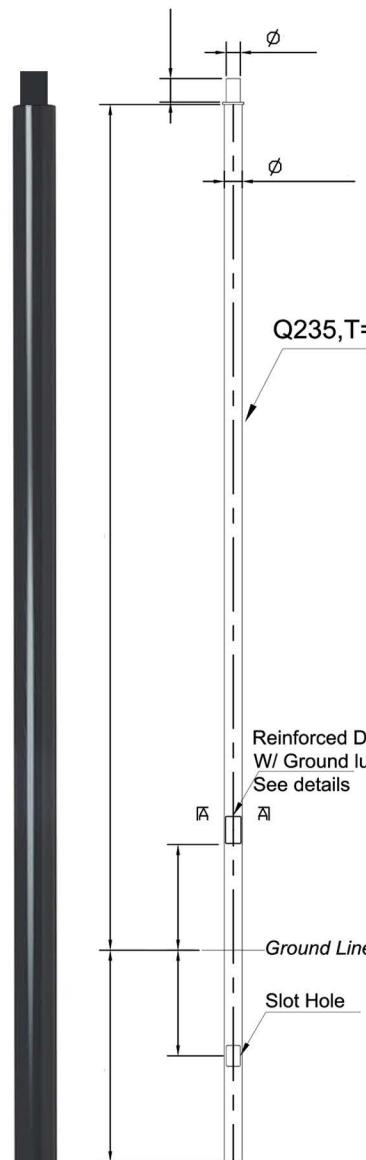

**Galvanized inside + out**



Handhole Details

**NOTES:**  
 MATERIAL: Q235;  
 SURFACE FINISH: AS SPECIFIED.  
 MANUFACTURED TO BS EN40;

### **ORDERING INFORMATION**

Specification type	Height	Wall thickness	Shaft base	Subsurface depth	Size
PMPF-RDB12FT3-11G-BLK	12 Ft	11 Gauge	3x3 in	3ft	3" x 3"