



Bilda BLD-HM08D-8W and BLD-HM15D-15W
Emergency backup installed in 2x2 and 2x4

These 2x2 and 2x4 Back-Lit LED panels are designed to deliver general ambient lighting in a variety of indoor settings including schools, offices, hospitals, stores, and are the perfect choice for both new construction and retrofits. This high-efficacy fixture is 5 CCT and power tunable as well as standard 0-10 V dimmable.


FEATURES

- * CCT: Color temperature selectable 35K, 4K, 5K, 60K
- * Adjustable power: 20W, 25W, 30W, 35W, 40W for 2x2 panel
- * Adjustable power: 30W, 40W, 50W, 60W, 72W for 2x4 panel
- * 130 Lumens per watt
- * Lumens: 2x2 : 2600 - 5200 LU - 2x4 : 3900 - 9360 LU
- * Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L70)
- * Universal 100-277 AC voltage (50-60Hz) is standard
- * 0-10 V dimming capability is standard
- * Power factor > 0.90 and CRI > 80
- * Viewing angle: 120 degrees
- * Easy installation in new construction or retrofit
- * Standard earthquake clips provide secure installation in grid ceilings
- * Standard mounting using recessed mounting in grid ceilings. Surface mount kit DTH-SMKT-22 and DTH-SMKT-24 sold separately. Also sold separately is a 6 x 2 ft cable suspension kit DTH-SK6
- * Pre-installed Bilda HM08D-8W emergency backup driver on the 2 x 2 panel and HM15D-15W on the 2x4 panel. Both emergency backup drivers are available on the other panels (order separately)

WARRANTY / LISTING

- * ETL listed
- * DLC standard listed
- * Suitable for temperatures from (-4°F to 140°F)
- * 5 year warranty

DIMENSIONS

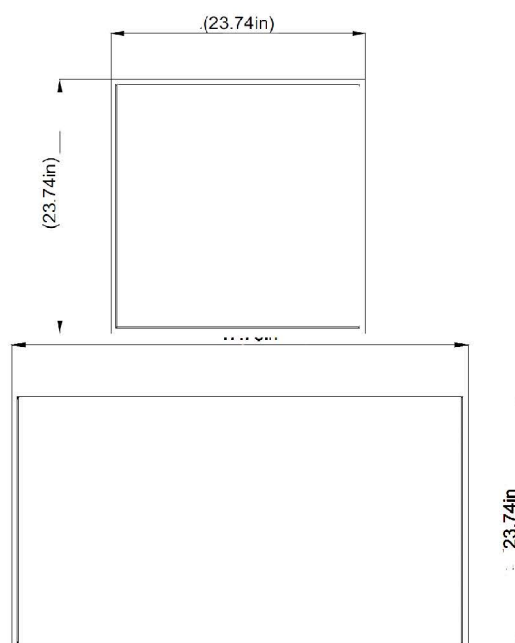

ORDERING INFORMATION

PART #	LUMENS	WATTAGE SELECTABLE	CCT TUNABLE	ACCESSORIES (order separately)
22BPANEL-40W-27-5TCP	2600 – 5200	20,25,30,35,40w	35K, 4K, 5K, 60K	BILDA HM08D-8W emergency backup. Surface Mounting kit and suspension Kits available
24BPANEL-72W-27-5TCP	3900 – 9360	30,40,50,60,72w	35K, 4K, 5K, 60K	
22BPANEL-40W-27-5TCP-EM	2600 – 5200	20,25,30,35,40w	35K, 4K, 5K, 60K	BILDA HM08D-8W emergency backup installed
24BPANEL-72W-27-5TCP-EM	3900 – 9360	30,40,50,60,72w	35K, 4K, 5K, 60K	BILDA HM15D-15W emergency backup installed